

Suzuki Swift ZC33S Torque Mount Fitting Instructions

Tools Required:

- Ratchet and Socket Set
- Cross-Head Screwdriver
- Trim Removal Tool or Flat-Blade Screwdriver

Kit Contents:


- 1x AIRTEC Motorsport Billet Torque Mount




PLEASE THOROUGHLY READ THESE INSTRUCTIONS AND MAKE SURE YOU ARE FAMILIAR WITH THE STEPS BEFORE CARRYING THEM OUT

Instructions


1. Working under the car remove the undertray by undoing the 10mm bolts (blue arrows) and cross headed screws (orange arrows) and then put it aside.

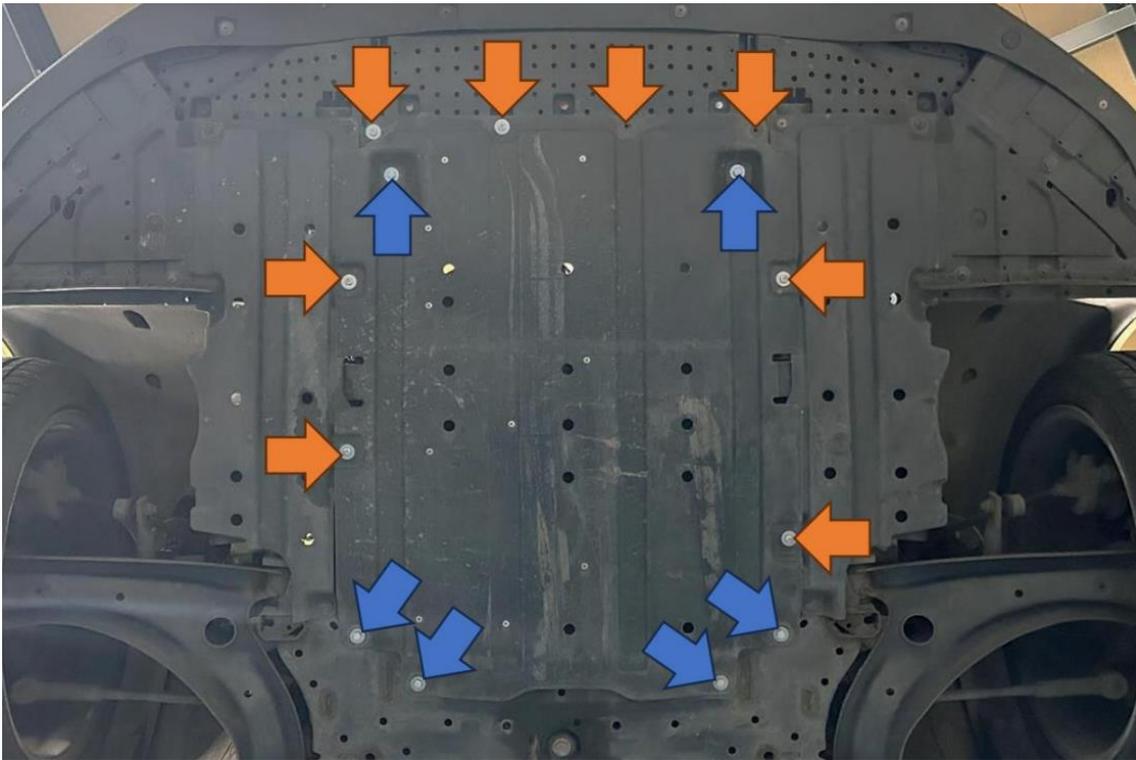


2. Locate the torque mount attached to the gearbox and remove the 17mm and 21mm bolts securing it in place.

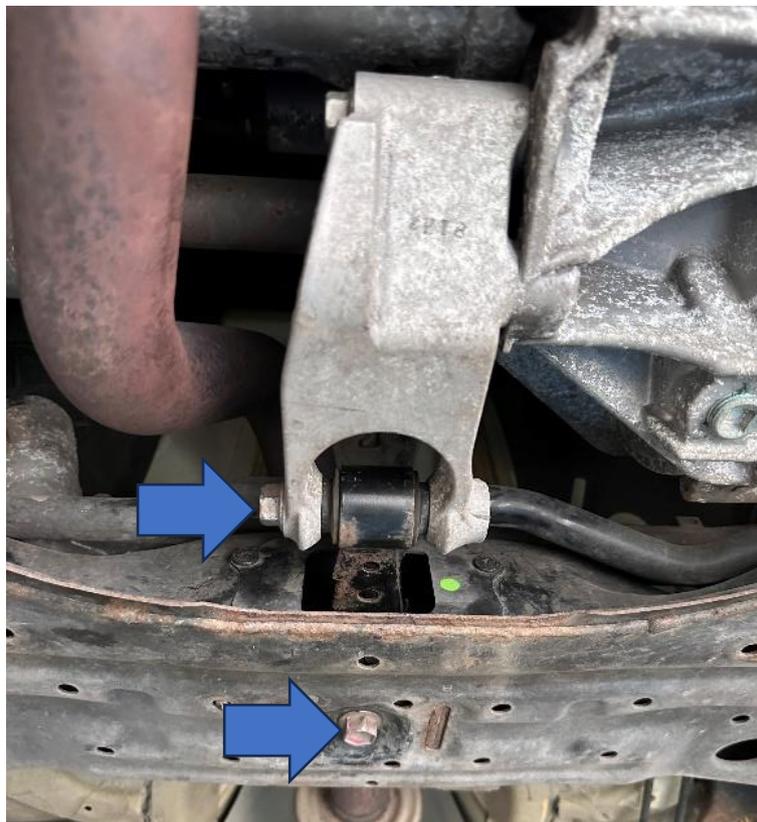

3. In order to remove the mount, you need to remove the bracket attached to the gearbox by undoing the three 14mm bolts securing it in place.

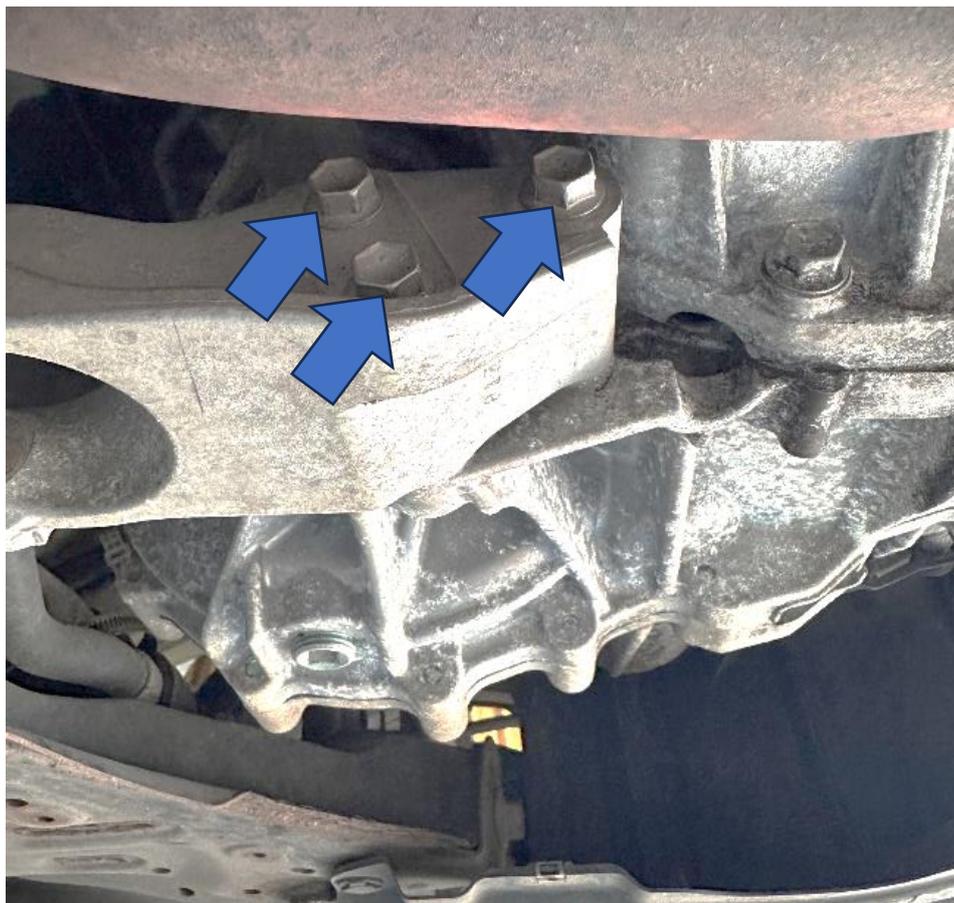

4. Use a Crosshead screwdriver to remove the two plastic push fittings on the either side of the torque mount. Then use a trim removal tool to release the fittings together with the plastic trim surround. The original torque mount can then be removed.

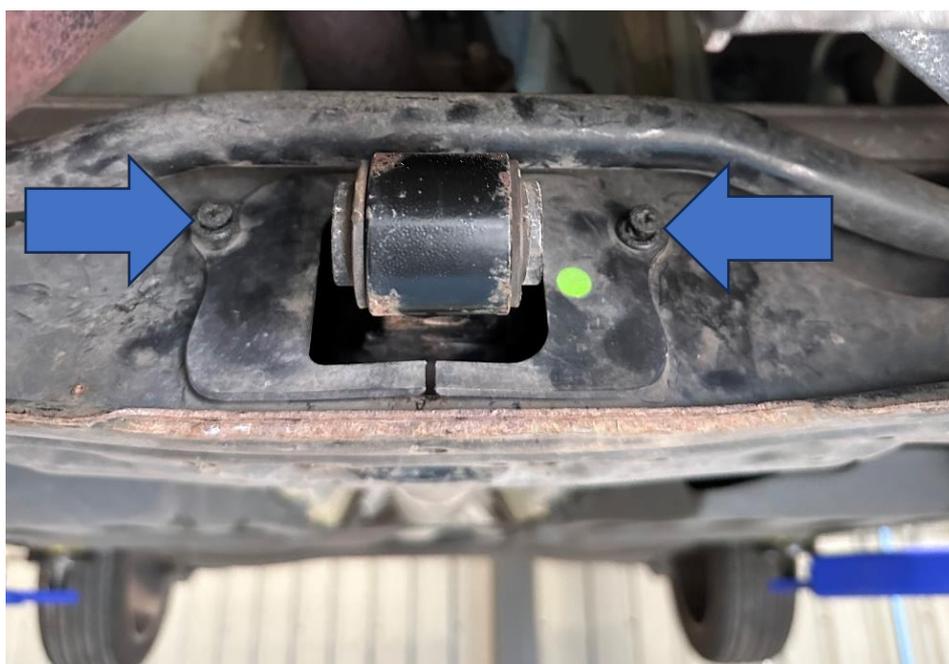

5. Finally, install the new AIRTEC Motorsport torque mount in reverse of removal. Once all bolts are fully tightened the undertray can be reinstalled.



AIRTEC ✖
MOTORSPORT

AIRTEC ✖
MOTORSPORT