

Toyota Yaris GR Engine Cover Fitting Instructions

Tools Required:

- 10mm Spanner
- 5mm Allen Key

Kit Contents:

- 1x AIRTEC Motorsport Engine Cover
- 3x Aluminium Mounting Bosses - (52mm/49mm/21mm)
- 1x M6x65mm Socket Head Bolt
- 1x M6x60mm Socket Head Bolt
- 1x M6x35mm Socket Head Bolt
- 3x M6 Pan Washers




PLEASE THOROUGHLY READ THESE INSTRUCTIONS AND MAKE SURE YOU ARE FAMILIAR WITH THE STEPS BEFORE CARRYING THEM OUT

Instructions:

1. Remove the engine cover, do this by pulling the four corners with enough force so the cover should pop off. **Please note:** the original engine cover uses four mounting posts but this replacement cover is designed to work using three posts, as the AIRTEC Motorsport inlet manifold upgrade eliminates one of the front posts. The car pictured has an AIRTEC Motorsport manifold fitted.




2. Locate the mounting posts as shown. (Cars with an original inlet manifold will have a fourth post on the inlet manifold that is not shown here).

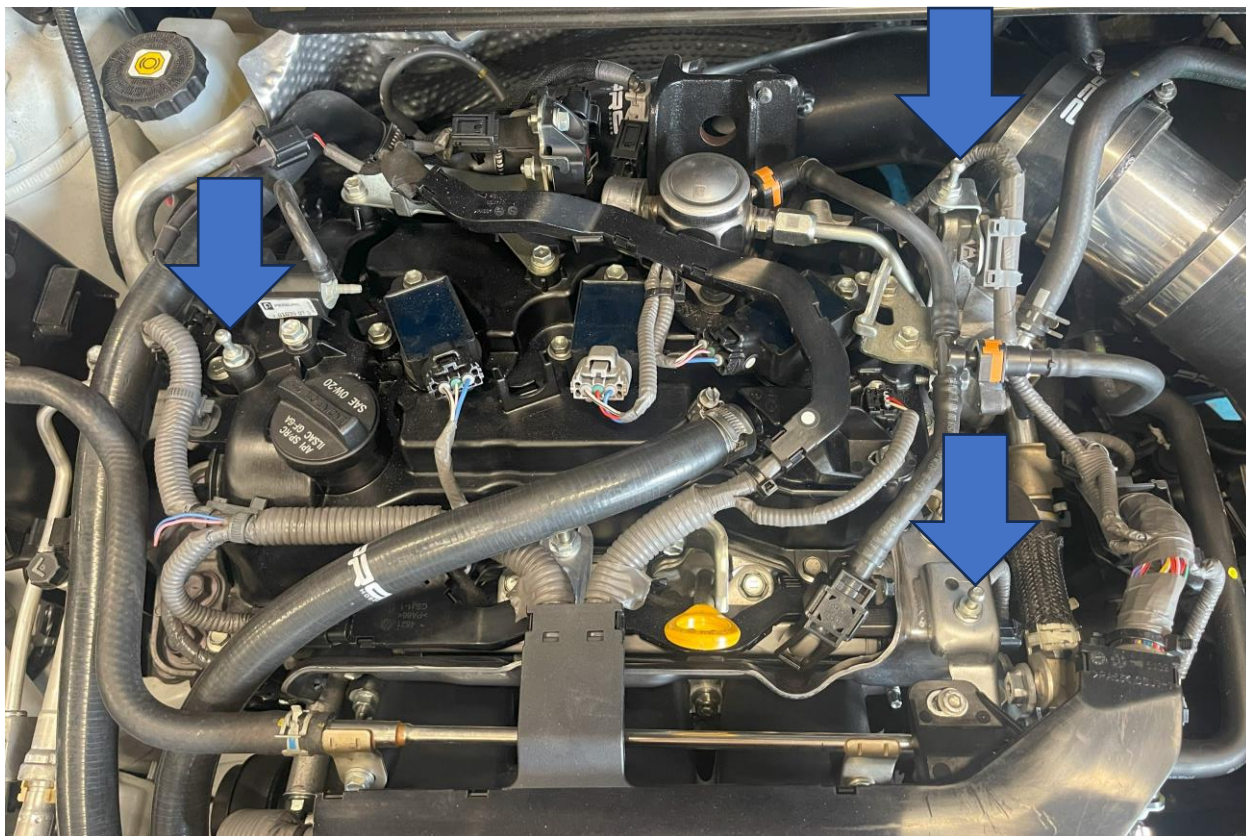

3. Remove the mounting posts using a 10mm spanner.




4. Place the longest boss (52mm) in the left-hand side location, as shown, and rest the engine cover over the top. Now screw in the compatible M6x65mm Socket Bolt with a washer but do not fully tighten yet.

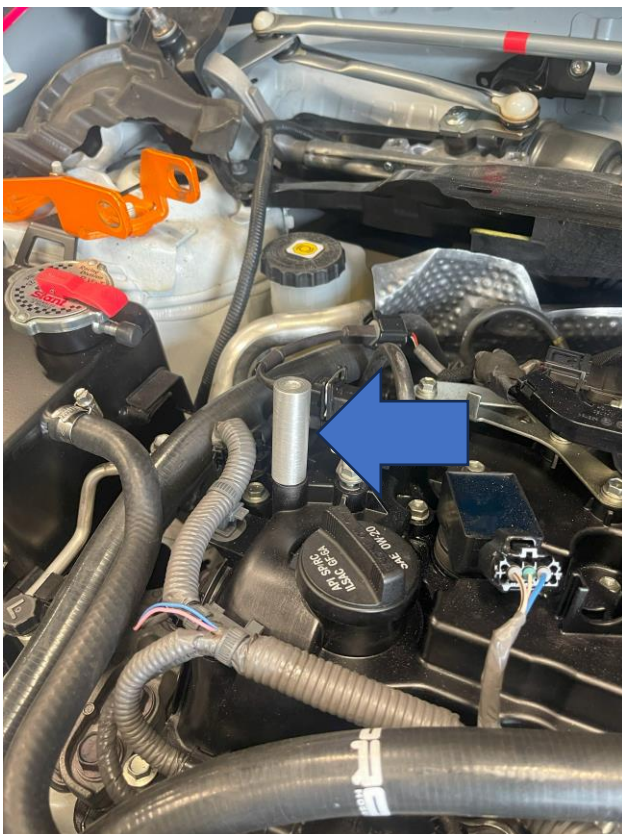

- Following the same process, place the shortest boss at the right-hand side rear location and use the accompanying bolt with washer to attach. Do not fully tighten yet.



- Place the remaining boss in the front hole location, as shown and attach it using the remaining bolt and washer. Do not fully tighten yet.

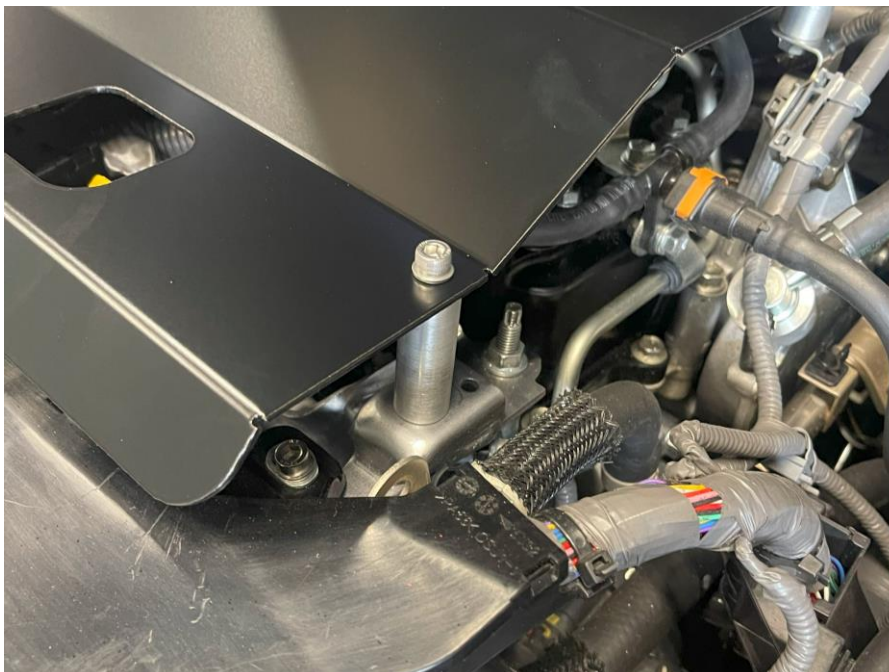

7. Finally, ensure the engine cover is perfectly straight before fully tightening all bolts.

